

t1


Guide for a successful installation

Before you install your new T1 integrated tap, there are a few things to bear in mind for a successful installation.

Consider water, waste, power and space.

Full installation instructions and cutting templates are provided in the product manual.

Capacity	Chilled 50 L/hr
Temperature	Chilled 2°C
Dispense height	310mm
Power	230-240V
Dimensions	Tap W42 x D165 x H385mm Undercounter W322 x D431 x H375mm
System	ProCore® DryChill®
Technology	EcoMode DeepSparkle® (select models only)
Hygiene	Totality®

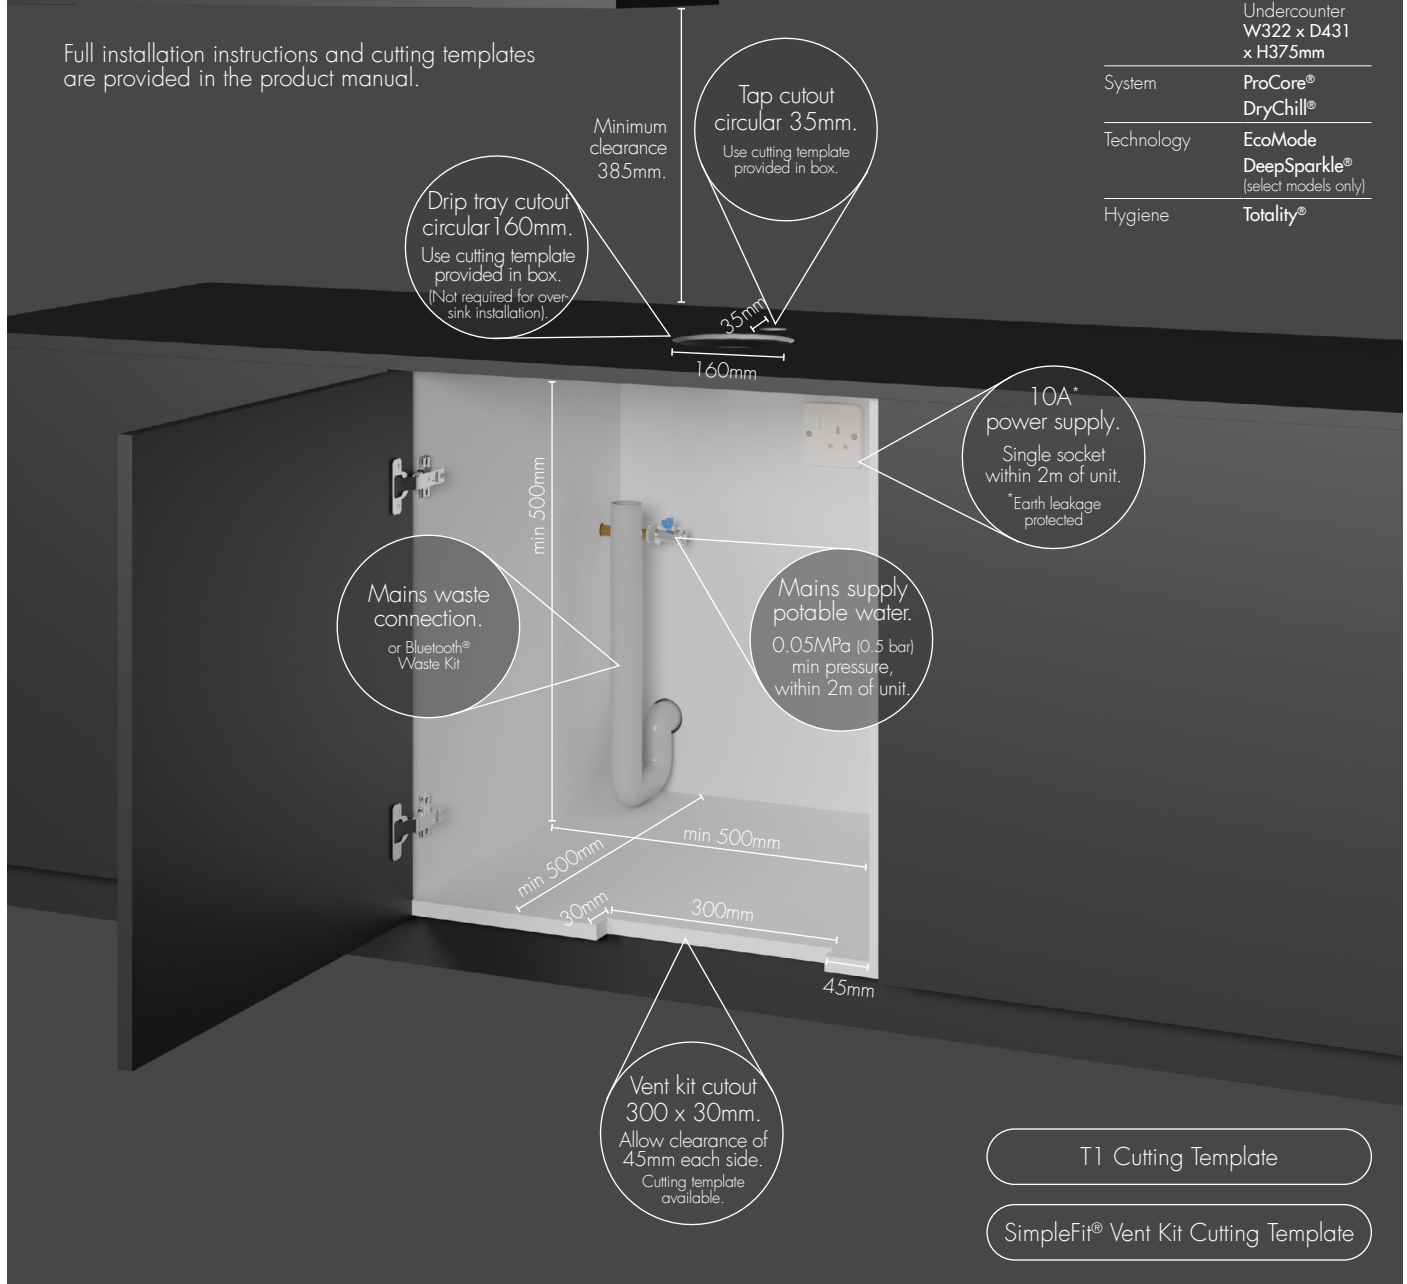

borg & overström

For support please contact



+44 (0)1362 695 006



support@borgandoverstrom.com

VIEW T1
MANUAL




t1

Guide for a successful installation

Once your T1 integrated tap is installed, you will need to sanitise prior to first use.

Full operation and sanitisation instructions are provided in the product manual.

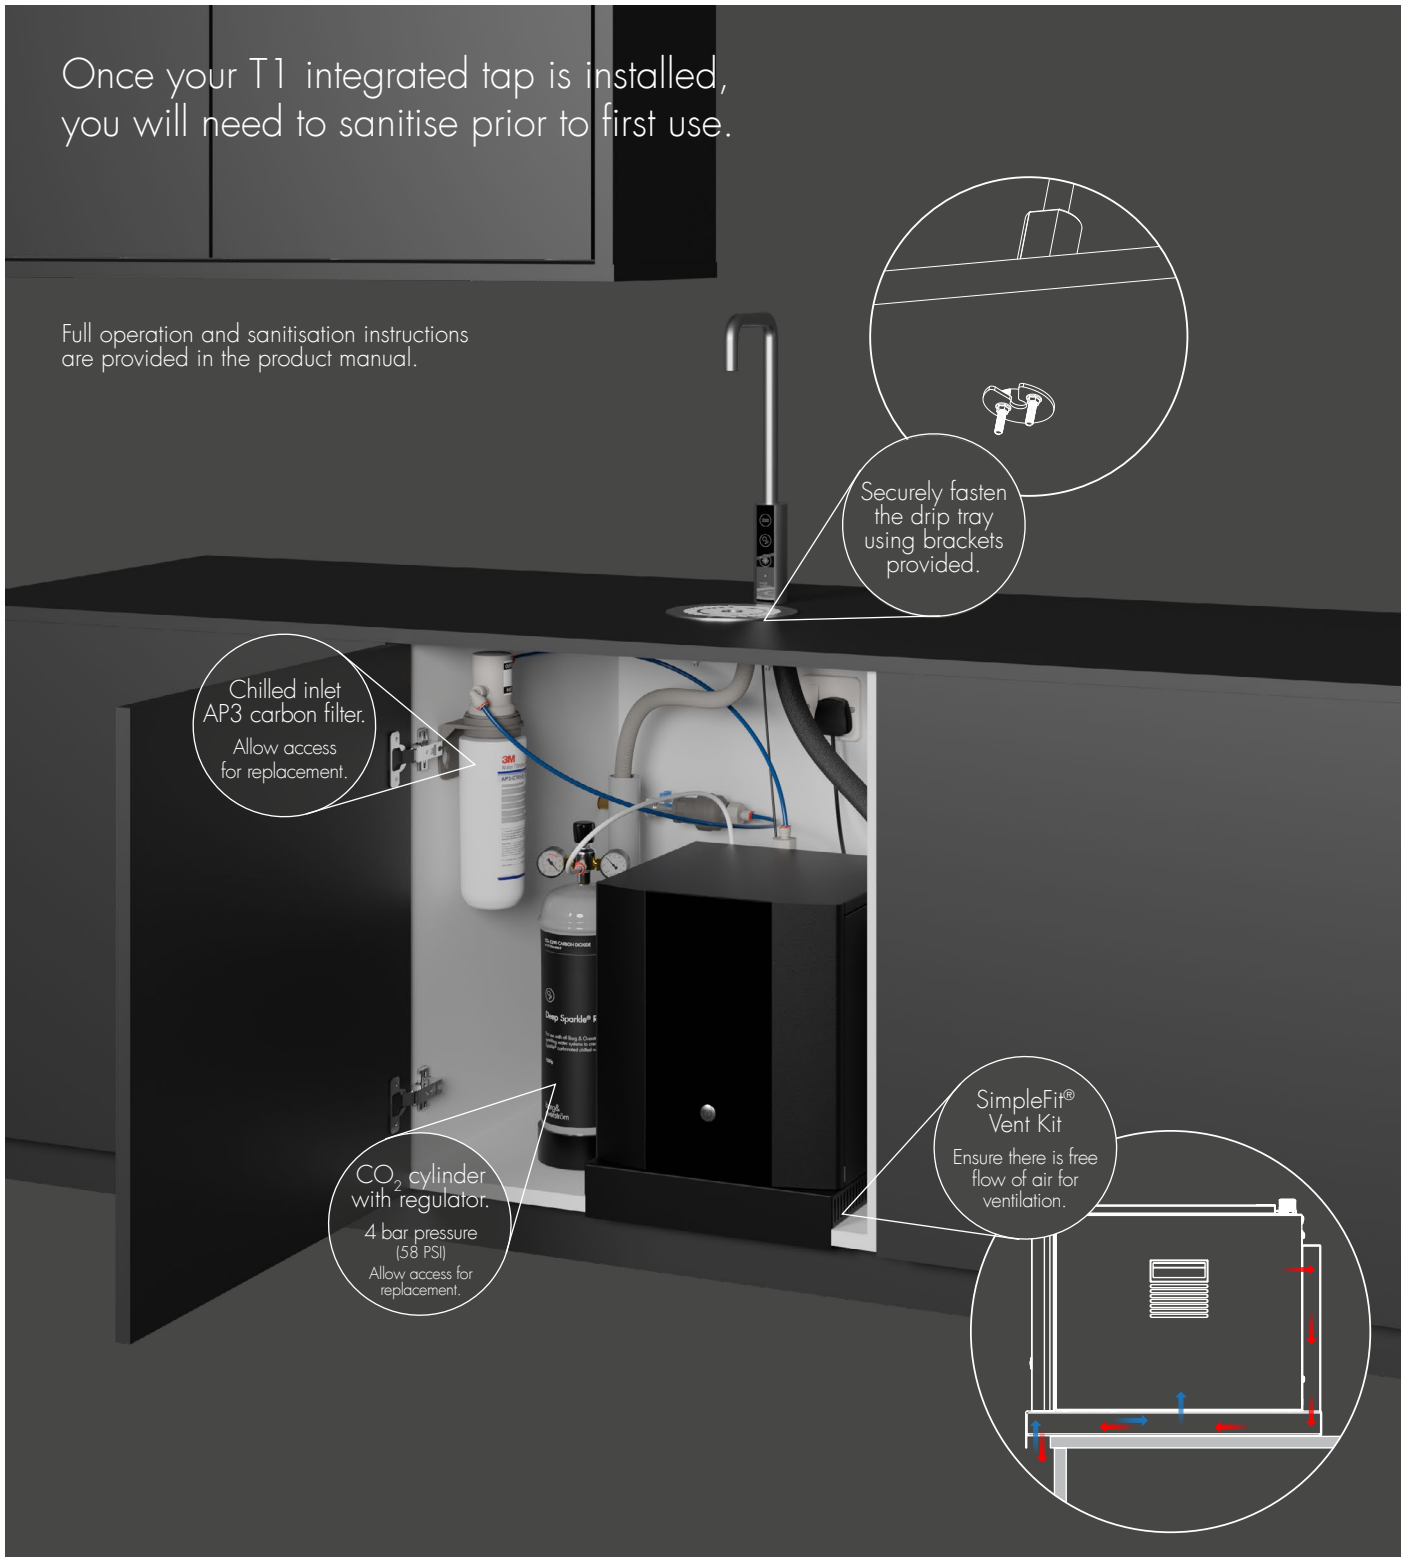

borg &
overström

For support please contact



+44 (0)1362 695 006



support@borgandoverstrom.com

VIEW T1
MANUAL

